



L I G H T I N G

SOURCE OF
LIGHT

360LAMP
Working Catalog

2021



ALITA NXAL-040-03

Vendor: 360LAMP

Light Source: 3W-330lm-2700K , 3W-330lm-3000K , 3W-330lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø35 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-040-03
Light Source	3W-330lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black
Light beam angle	12°/ 24°/ 38°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø40 mm*H75 mm
Cut-out	Ø35 mm



ALITA NXAL-040-07

Vendor: 360LAMP

Light Source: 7W-770lm-2700K , 7W-770lm-3000K , 7W-770lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø35mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-040-07
Light Source	7W-770lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black
Light beam angle	12°/ 24°/ 38°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø40 mm*H75 mm
Cut-out	Ø35 mm



ALITA NXAL-050-03

Vendor: 360LAMP

Light Source: 3W-330lm-2700K , 3W-330lm-3000K , 3W-330lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø45 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-050-03
Light Source	3W-330lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black
Light beam angle	12°/ 24°/ 38°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø50 mm*H80 mm
Cut-out	Ø45 mm



ALITA NXAL-050-07

Vendor: 360LAMP

Light Source: 7W-770lm-2700K , 7W-770lm-3000K , 7W-770lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø45 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-050-07
Light Source	7W-770lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black
Light beam angle	12°/ 24°/ 38°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø50 mm*H80 mm
Cut-out	Ø45 mm



ALITA TRIMLESS NXAL-065-05-TL

Vendor: 360LAMP

Light Source: 5.3W-520lm-2700K , 5.3W-520lm-3000K , 5.3W-520lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting frame. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-065-05-TL
Light Source	5.3W-520lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø65 mm*H80 mm
Cut-out	Ø65 mm



ALITA TRIMLESS NXAL-065-08-TL

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting frame. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-065-08-TL
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø65 mm*H80 mm
Cut-out	Ø65 mm



ALITA TRIMLESS ADJUSTABLE NXAL-065-05-TL-AD

Vendor: 360LAMP

Light Source: 5.3W-520lm-2700K , 5.3W-520lm-3000K , 5.3W-520lm-4000K ,

Driver: O-On/Off , DIM1-1 $\frac{1}{2}$ 10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting frame. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ C) = 50,000\ h$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-065-05-TL-AD
Light Source	5.3W-520lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1 $\frac{1}{2}$ 10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø65 mm*H80 mm
Cut-out	Ø65 mm



ALITA TRIMLESS ADJUSTABLE NXAL-065-08-TL-AD

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting frame. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-065-08-TL-AD
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø65 mm*H80 mm
Cut-out	Ø65 mm



ALITA NXAL-072-05

Vendor: 360LAMP

Light Source: 5.3W-520lm-2700K , 5.3W-520lm-3000K , 5.3W-520lm-4000K ,

Driver: O-On/Off , DIM1-1 $\frac{1}{2}$ 10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q 25^\circ\text{C}) = 50,000$ h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-072-05
Light Source	5.3W-520lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1 $\frac{1}{2}$ 10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø72 mm*H80 mm
Cut-out	Ø65 mm



ALITA NXAL-072-08

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-072-08
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø72 mm*H80 mm
Cut-out	Ø65 mm



ALITA ADJUSTABLE NXAL-072-05-AD

Vendor: 360LAMP

Light Source: 5.3W-520lm-2700K , 5.3W-520lm-3000K , 5.3W-520lm-4000K ,

Driver: O-On/Off , DIM1-1 $\frac{1}{2}$ 10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-072-05-AD
Light Source	5.3W-520lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1 $\frac{1}{2}$ 10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø72 mm*H80 mm
Cut-out	Ø65 mm



ALITA ADJUSTABLE NXAL-072-08-AD

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 65 mm, Recess depth 80 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-072-08-AD
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø72 mm*H80 mm
Cut-out	Ø65 mm



ALITA TRIMLESS NXAL-075-08-TL

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-075-08-TL
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø75 mm*H85 mm
Cut-out	Ø75 mm



ALITA TRIMLESS NXAL-075-10-TL

Vendor: 360LAMP

Light Source: 10.5W-1050lm-2700K , 10.5W-1050lm-3000K , 10.5W-1050lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-075-10-TL
Light Source	10.5W-1050lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø75 mm*H85 mm
Cut-out	Ø75 mm



ALITA TRIMLESS NXAL-075-12-TL

Vendor: 360LAMP

Light Source: 12.5W-1092lm-2700K , 12.5W-1092lm-3000K , 12.5W-1092lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-075-12-TL
Light Source	12.5W-1092lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø75 mm*H85 mm
Cut-out	Ø75 mm



ALITA TRIMLESS ADJUSTABLE NXAL-075-08-TL-AD

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1 $\frac{1}{2}$ 10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q 25\text{ }^{\circ}\text{C}) = 50,000\text{ h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-075-08-TL-AD
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1 $\frac{1}{2}$ 10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø75 mm*H85 mm
Cut-out	Ø75 mm



ALITA TRIMLESS ADJUSTABLE NXAL-075-10-TL-AD

Vendor: 360LAMP

Light Source: 10.5W-1050lm-2700K , 10.5W-1050lm-3000K , 10.5W-1050lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-075-10-TL-AD
Light Source	10.5W-1050lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø75 mm*H85 mm
Cut-out	Ø75 mm



ALITA TRIMLESS ADJUSTABLE NXAL-075-12-TL-AD

Vendor: 360LAMP

Light Source: 12.5W-1092lm-2700K , 12.5W-1092lm-3000K , 12.5W-1092lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED trimless downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-075-12-TL-AD
Light Source	12.5W-1092lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø75 mm*H85 mm
Cut-out	Ø75 mm



ALITA NXAL-082-08

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-082-08
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø82 mm*H85 mm
Cut-out	Ø75 mm



ALITA NXAL-082-10

Vendor: 360LAMP

Light Source: 10.5W-1050lm-2700K , 10.5W-1050lm-3000K , 10.5W-1050lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model No.	NXAL-082-10
Light Source	10.5W-1050lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø82 mm*H85 mm
Cut-out	Ø75 mm



ALITA NXAL-082-12

Vendor: 360LAMP

Light Source: 12.5W-1092lm-2700K , 12.5W-1092lm-3000K , 12.5W-1092lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-082-12
Light Source	12.5W-1092lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø82 mm*H85 mm
Cut-out	Ø75 mm



ALITA ADJUSTABLE NXAL-082-08-AD

Vendor: 360LAMP

Light Source: 8.3W-788lm-2700K , 8.3W-788lm-3000K , 8.3W-788lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) R_a > 90. Mean rated service life L₇₀(t_q 25 °C) = 50,000 h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-082-08-AD
Light Source	8.3W-788lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø82 mm*H85 mm
Cut-out	Ø75 mm



ALITA ADJUSTABLE NXAL-082-10-AD

Vendor: 360LAMP

Light Source: 10.5W-1050lm-2700K , 10.5W-1050lm-3000K , 10.5W-1050lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ C) = 50,000\ h$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-082-10-AD
Light Source	10.5W-1050lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø82 mm*H85 mm
Cut-out	Ø75 mm



ALITA ADJUSTABLE NXAL-082-12-AD

Vendor: 360LAMP

Light Source: 12.5W-1092lm-2700K , 12.5W-1092lm-3000K , 12.5W-1092lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round construction. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 75 mm, Recess depth 85 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ C) = 50,000\ h$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-082-12-AD
Light Source	12.5W-1092lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø82 mm*H85 mm
Cut-out	Ø75 mm



ALITA NXAL-115-30

Vendor: 360LAMP

Light Source: 30W-3300lm-2700K , 30W-3300lm-3000K , 30W-3300lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 100 mm, Recess depth 120 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q 25^\circ\text{C}) = 50,000$ h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-115-30
Light Source	30W-3300lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø115 mm*H120 mm
Cut-out	Ø100 mm



ALITA NXAL-115-40

Vendor: 360LAMP

Light Source: 40W-4400lm-2700K , 40W-4400lm-3000K , 40W-4400lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 100 mm, Recess depth 120 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q 25^\circ\text{C}) = 50,000$ h. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-115-40
Light Source	40W-4400lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø115 mm*H120 mm
Cut-out	Ø100 mm



ALITA ADJUSTABLE NXAL-115-15-AD

Vendor: 360LAMP

Light Source: 15W-1650lm-2700K , 15W-1650lm-3000K , 15W-1650lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 100 mm, Recess depth 120 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q 25\text{ }^{\circ}\text{C}) = 50,000\text{ h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-115-15-AD
Light Source	15W-1650lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø115 mm*H120 mm
Cut-out	Ø100 mm



ALITA ADJUSTABLE NXAL-115-24-AD

Vendor: 360LAMP

Light Source: 24W-2640lm-2700K , 24W-2640lm-3000K , 24W-2640lm-4000K ,

Driver: O-On/Off , DIM1-1 $\frac{1}{2}$ 10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 100 mm, Recess depth 120 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-115-24-AD
Light Source	24W-2640lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1 $\frac{1}{2}$ 10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø115 mm*H120 mm
Cut-out	Ø100 mm



ALITA ADJUSTABLE NXAL-140-15-AD

Vendor: 360LAMP

Light Source: 15W-1650lm-2700K , 15W-1650lm-3000K , 15W-1650lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 125 mm, Recess depth 130 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ\text{C}) = 50,000\ \text{h}$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-140-15-AD
Light Source	15W-1650lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø140 mm*H130 mm
Cut-out	Ø125 mm



ALITA ADJUSTABLE NXAL-140-24-AD

Vendor: 360LAMP

Light Source: 24W-2640lm-2700K , 24W-2640lm-3000K , 24W-2640lm-4000K ,

Driver: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Accessories: None , Honeycomb , Softening Lens ,

[More Information](#)

Description

Adjustable compact LED downlight with round white frame. Recessed downlight for cut-out ceiling openings. Tool-free ceiling installation via rapid-mounting springs. Cut-out opening Ø 125 mm, Recess depth 130 mm. Aluminium reflector highly specular anodized. Glare evaluation according to UGR < 19. Configured with one LED adjustable spot module. Light colour warm white, correlated colour temperature (CCT) 2700 K, 3000K and 4000K. General colour rendering index (CRI) $R_a > 90$. Mean rated service life $L_{70}(t_q\ 25\ ^\circ C) = 50,000\ h$. Luminaire body of die-cast aluminium. Surface coated dark grey. Luminaire body and heat sink form a compact unit. Protection rating: IP20. With an electronic transformer, switchable.

Specification

Model Number	NXAL-140-24-AD
Light Source	24W-2640lm-2700K/ 3000K/ 4000K
CRI	90
Driver	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Reflector color	Black/ White
Light beam angle	15°/ 24°/ 38°/ 48°
Accessories	Honeycomb/ Softening Lens
Dimension	Ø140 mm*H130 mm
Cut-out	Ø125 mm



QUADRO RECESSED QU11765-20-RDS

Vendor: 360LAMP

System Power: 23W-1640lm-3000K/Down-Symmetric ,
23W-1725lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1168mm ,

[More Information](#)

Description

Available for recessed application – down, symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color powder-coated in white; High-Performance Opal cover for uniform illumination; or Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 80; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU11765-20-RDS
System Power	L1168mm: 23W-3000K-1640lm/ 4000K-1725lm L1518mm: 30W-3000K-2140lm/ 4000K-2250lm
Optic Cover	High-Performance Opal Cover/ Continuous High-Performance Opal Cover
Light Distribution	Down-Symmetric
CRI	80
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	White
Dimension	W117 mm*H65 mm*L1168 mm (L1518mm or Customized Length)



QUADRO RECESSED QU6066-20-RDS

Vendor: 360LAMP

System Power: 23W-1740lm-3000K/Down-Symmetric ,
23W-1840lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1158mm ,

[More Information](#)

Description

Available for recessed application – down, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color powder-coated in white; High-Performance Opal cover for uniform illumination; or Micro Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6066-20-RDS
System Power	L1158mm: 23W-3000K-1740lm/ 4000K-1840lm L1508mm: 30W-3000K-2280lm/ 4000K-2400lm
Optic Cover	High-Performance Opal/Micro Prismatic Cover Continuous High-Performance Opal Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	White
Dimension	W60 mm*H66 mm*L1160 mm/ (L1508 or Customized Length)



QUADRO RECESSED QU8676-20-RDA

Vendor: 360LAMP

System Power: 23W-1770lm-3000K/Down-Asymmetric ,
23W-1863lm-4000K/Down-Asymmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1146mm ,

[More Information](#)

Description

Available for recessed application – down, and asymmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color powder-coated in white; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU8676-20-RDA
System Power	L1146mm: 23W-3000K-1770lm/ 4000K-1863lm L1496mm: 30W-3000K-2300lm/ 4000K-2430lm
Optic Cover	High-Performance Opal Cover
Light Distribution	Down-Asymmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	White
Dimension	W86 mm*H76 mm*L1146 mm/ (L1496mm or Customized Length)



QUADRO RECESSED QU8676-20-RDS

Vendor: 360LAMP

System Power: 23W-1660lm-3000K/Down-Symmetric ,
23W-1748lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1-10V , DIM2-DALI ,

Length: 1158mm ,

[More Information](#)

Description

Available for recessed application – down, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color powder-coated in white; High-Performance Opal cover for uniform illumination; or Micro Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU8676-20-RDS
System Power	L1158mm: 23W-3000K-1660lm/ 4000K-1748lm L1508mm: 30W-3000k-2160lm/ 4000K-2280lm
Optic Cover	High-Performance Opal/Micro Prismatic Cover/ Continuous High-Performance Opal Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1-10V/ DIM2-DALI
Surface color	White
Dimension	W86 mm*H76 mm*L1158 mm/ (L1508mm or Customized Length)



QUADRO SUSPENDED QU16545-40-SUD

Vendor: 360LAMP

System Power: 50W-3800lm-3000K/Up-Down , 50W-4000lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1236mm ,

[More Information](#)

Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; Micro Prismatic Polycarbonate diffuser for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU16545-40-SUD
System Power	50W-3000K 3800lm/ 4000K 4000lm
Optic Cover	Micro Prismatic Cover
Light Distribution	Up20%-Down80%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W165 mm*H45 mm*L1236 mm



QUADRO SUSPENDED QU16545-40G-SUD

Vendor: 360LAMP

System Power: 45W-3285lm-3000K/Up-Down , 45W-3510lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1236mm ,

[More Information](#)

Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; Dark Light Louver for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU16545-40G-SUD
System Power	45W-3000K 3285lm/ 4000K 3510lm
Optic Cover	Dark Light Louver
Light Distribution	Up20%-Down80%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W165 mm*H45 mm*L1236 mm



QUADRO SUSPENDED QU22045-40L-SUD

Vendor: 360LAMP

System Power: 50W-3890lm-3000K/Up-Down , 50W-4100lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1-10V , DIM2-DALI ,

Length: 1135mm ,

[More Information](#)

Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; Micro Prismatic Polycarbonate diffuser for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU22045-40L-SUD
System Power	50W-3000K 3890lm/ 4000K 4100lm
Optic Cover	Micro Prismatic Cover
Light Distribution	Up20%-Down80%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1-10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W220 mm*H45 mm*L1155 mm



QUADRO SUSPENDED QU22045-40R-SUD

Vendor: 360LAMP

System Power: 50W-3890lm-3000K/Up-Down , 50W-4100lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1155mm ,

[More Information](#)

Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; Micro Prismatic Polycarbonate diffuser for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU22045-40R-SUD
System Power	50W-3000K 3890lm/ 4000K 4100lm
Optic Cover	Micro Prismatic Cover
Light Distribution	Up20%-Down80%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W220 mm*H45 mm*L1155 mm



QUADRO SUSPENDED QU32020-40-SUD

Vendor: 360LAMP

Light Source: 50W-2750lm-3000K/Up-Down , 50W-3000lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1203mm ,

[More Information](#)

Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover (HPO) for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU32020-40-SUD
System Power	50W-3000K 2750lm/ 4000K 3000lm
Optic Cover	High-Performance Opal Pannel
Light Distribution	Up50%-Down50%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W333 mm*H32 mm*L1203 mm

QUADRO SUSPENDED QU4268-30-SDA

Vendor: 360LAMP

Light Source: 36W-2580lm-3000K/Down-Asymmetric ,
36W-2736lm-4000K/Down-Asymmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1181mm ,

More Information



Description

Available for surface mounted, or suspended application – down, asymmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU4268-30-SDA
System Power	L1181mm: 36W-3000K-2580lm/ 4000K-2736lm L1480mm: 45W-3000K-3250lm/ 4000K-3420lm
Optic Cover	High-Performance Opal Cover
Light Distribution	Down-Asymmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W42 mm*H70 mm*L1181 mm/ (L1480mm or Customized Length)



QUADRO SUSPENDED QU4268-30-SDS

Vendor: 360LAMP

System Power: 35W-2640lm-3000K/Down-Symmetric ,
35W-2800lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1146mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover (HPO) for uniform illumination; or Micro Prismatic Polycarbonate diffuser for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU4268-30-SDS
System Power	L1146mm: 35W-3000K-2640lm/ 4000K-2800lm L1496mm: 45W-3000K-3420lm/ 4000K-3600lm
Optic Cover	High-Performance Opal/ Micro Prismatic Cover/ Continuous High-Performance Opal Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W42 mm*H70 mm*L1146 mm/ (L1496mm or Customized Length)



QUADRO SUSPENDED QU4268-40-SUD

Vendor: 360LAMP

System Power: 46W-3520lm-3000K/Up-Down , 46W-3726lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1146mm ,

[More Information](#)

Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover (HPO) for uniform illumination; or Micro Prismatic Polycarbonate diffuser for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU4268-40-SUD
System Power	L1146mm: 46W-3000K-3520lm/ 4000K-3726lm L1496mm: 46W-3000K-4620lm/ 4000K-4860lm
Optic Cover	High-Performance Opal/Micro Prismatic Cover/ Continuous High-Performance Opal Cover
Light Distribution	Up25%-Down75%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W42 mm*H70 mm*L1146 mm/



QUADRO SUSPENDED QU4268-40G-SDS

Vendor: 360LAMP

System Power: 42W-2950lm-3000K/Down-Symmetric ,
42W-3150lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-
DALI ,

Length: 1070mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; Dark Light Louver for uniform illumination and low glare control; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU4268-40G-SDS
System Power	L1070mm: 42W-3000K-2950lm/ 4000K-3150lm L1468mm: 58W-3000K-4130lm/ 4000K-4350lm
Optic Cover	Dark Light Louver
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W42 mm*H70 mm*L1070 mm/ (L1468mm or Customized Length)



QUADRO SUSPENDED QU4285-30-SDS

Vendor: 360LAMP

System Power: 35W-2190lm-3000K/Down-Symmetric ,
35W-2310lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-
DALI ,

Length: 1000mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU4285-30-SDS
System Power	L1134mm: 35W-3000K-2190lm/ 4000K-2310lm L1484mm: 45W-3000K-2820lm/ 4000K-2970lm
Optic Cover	High-Performance Opal Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W42 mm*H85 mm*L1134 mm (L1484mm or Customized Length)



QUADRO SUSPENDED QU4285-40-SUD

Vendor: 360LAMP

System Power: 46W-2830lm-3000K/Up-Down , 46W-3400lm-2990K/Up-Down , 46W-2990lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1134mm ,

[More Information](#)

Description

Available for suspended application – down-up and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU4285-40-SUD
System Power	L1134mm: 46W-3000K 2830lm/ 4000K-2990lm L1484mm: 60W-3000K-3700lm/ 4000K-3900lm
Optic Cover	High-Performance Opal Cover
Light Distribution	Up25%-Down75%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W42 mm*H85 mm*L1134 mm/ (L1484mm or Customized Length)



QUADRO SUSPENDED QU4290-30-SDS

Vendor: 360LAMP

System Power: 35W-2475lm-3000K/Down-Symmetric ,
35W-2625lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-
DALI ,

Length: 1146mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU4290-30-SDS
System Power	L1146mm: 35W-3000K-2475lm/ 4000K-2625lm L1496mm: 45W-3000-3200lm/ 4000K-3375lm
Optic Cover	High-Performance Opal
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W42 mm*H90 mm*L1146 mm/ (L1496mm or Customized Length)



QUADRO SUSPENDED QU5870E-40-SDS

Vendor: 360LAMP

System Power: 40W-2720lm-3000K/Down-Symmetric ,
40W-2840lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 992mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU5870E-40-SDS
System Power	L992mm: 40W-3000K 2720lm/ 4000K 2840lm L1482mm: 60W-3000K-4050lm/ 4000K-4260lm
Optic Cover	High-Performance Opal Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W58 mm*H70 mm*L992 mm/ (L1482mm or Customized Length)



QUADRO SUSPENDED QU5870E-80-SDA

Vendor: 360LAMP

System Power: 80W-5390lm-3000K/Down-Asymmetric ,
80W-5680lm-4000K/Down-Asymmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-
DALI ,

Length: 992mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, and a asymmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU5870E-80-SDA
	L992mm: 80W-3000K-5390lm/ 4000K-5680lm
System Power	L1482mm: 120W-3000K-8095lm/ 4000K-8520lm
Optic Cover	High-Performance Opal Cover
Light Distribution	Down-Asymmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W58 mm*H70 mm*L992 mm/ (L1482mm or Customized Length)



QUADRO SUSPENDED QU6877E-40-SDA

Vendor: 360LAMP

System Power: 80W-6880lm-3000K/Down-Asymmetric ,
80W-7200lm-4000K/Down-Asymmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1080mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, and a asymmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; or Micro Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6877E-40-SDA
	L1080mm: 80W-3000K-6880lm/ 4000K-7200lm
System Power	L1496mm: 120W-3000K-10200lm/ 4000K-10800lm
Optic Cover	High-Performance Opal/ Micro Prismatic Cover/ Continuous High-Performance Opal Cover
Light Distribution	Down-Asymmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W68 mm*H77 mm*L1080 mm (L1496mm or Customized Length)



QUADRO SUSPENDED QU6877E-40-SDS

Vendor: 360LAMP

System Power: 40W-3420lm-3000K/Down-Symmetric ,
40W-3600lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 992mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; or Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6877E-40-SDS
System Power	L992mm: 40W-3000K-3440lm/ 4000K-3600lm
	L1482mm: 60W-3000K-5130lm/ 4000K-5400lm
Optic Cover	High-Performance Opal/Micro Prismatic Cover
	Continuous High-Performance Opal Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W68 mm*H77 mm*L992 mm/
	(L1482mm or Customized Length)



QUADRO SUSPENDED QU6882-30-SDA

Vendor: 360LAMP

System Power: 35W-2485lm-3000K/Down-Asymmetric ,
35W-2625lm-4000K/Down-Asymmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1134mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, and asymmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6882-30-SDA
System Power	L1134mm: 35W-3000K-2485lm/ 4000K-2625lm L1484mm: 45W-3000K-3200lm/ 4000K-3375lm
Optic Cover	High-Performance Opal Cover
Light Distribution	Down-Asymmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W68 mm*H82 mm*L1134 mm/ (L1484mm or Customized Length)



QUADRO SUSPENDED QU6882-30-SDS

Vendor: 360LAMP

System Power: 35W-2835lm-3000K/Down-Symmetric ,
35W-2975lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1146mm ,

[More Information](#)


Description

Available for surface mounted, or suspended application – down, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; or Micro Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6882-30-SDS
System Power	L1146mm: 35W-3000K-2835lm/ 4000K-2975lm L1496mm: 45W-3000K-3630lm/ 4000K-3825lm
Optic Cover	High-Performance Opal/Micro Prismatic Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W68 mm*H82 mm*L1146 mm/ (L1496mm or Customized Length)

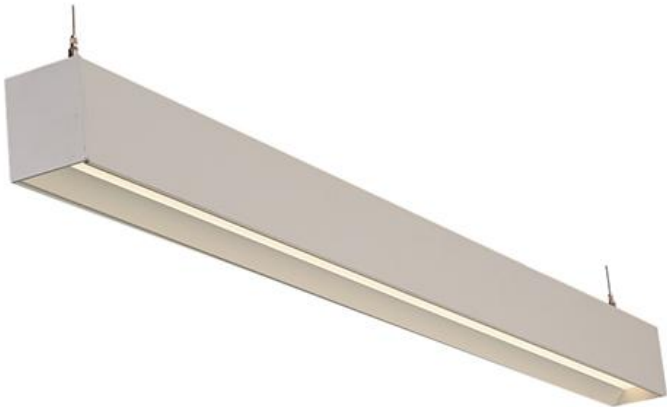

QUADRO SUSPENDED QU6882-30V-SDS

Vendor: 360LAMP

System Power: 35W-1995lm-3000K/Down-Symmetric ,
35W-2100lm-4000K/Down-Symmetric ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1134mm ,

[More Information](#)

Description

Available for surface mounted, or suspended application – down, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; Micro Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6882-30V-SDS
System Power	L1134mm: 35W-3000K-1995lm/ 4000K-2100lm L1484mm: 45W-3000K-2565lm/ 4000K-2700lm
Optic Cover	Micro Prismatic Cover
Light Distribution	Down-Symmetric
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W68 mm*H82 mm*L1146 mm/ (L1484mm or Customized Length)



QUADRO SUSPENDED QU6882-40-SUD

Vendor: 360LAMP

System Power: 46W-3270lm-3000K/Up-Down , 46W-3450lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1146mm ,

[More Information](#)


Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; High-Performance Opal cover for uniform illumination; or Micro Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6882-40-SUD
System Power	L1146mm: 46W-3000K-3270lm/ 4000K-3450lm
Optic Cover	High-Performance Opal/Micro Prismatic Cover Continuous High-Performance Opal Cover
Light Distribution	Up25%-Down75%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W68 mm*H82 mm*L1146 mm/ (L1496mm or Customized Length)

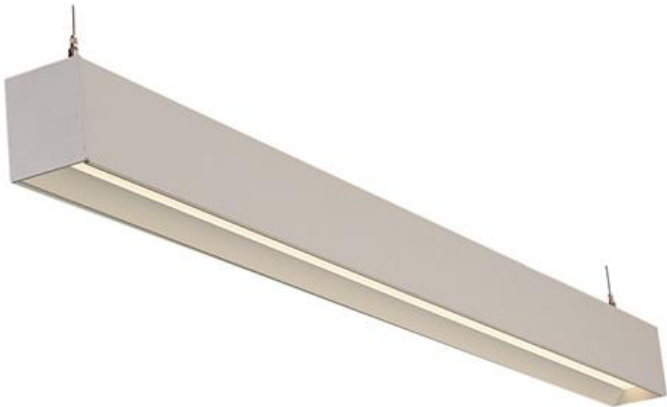

QUADRO SUSPENDED QU6882-40V-SUD

Vendor: 360LAMP

System Power: 40W-2340lm-3000K/Up-Down , 40W-2600lm-4000K/Up-Down ,

Electronic Transformer: O-On/Off , DIM1-1~10V , DIM2-DALI ,

Length: 1146mm ,

[More Information](#)

Description

Available for suspended application – down-up, and symmetric light effect.

Luminaire body from an extruded aluminum profile; no visible screws; designed for either individual lights or continuous lighting systems; surface color in silver or powder-coated in white; surface mounted or suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; incl. transparent 1500mm power feed cable; Micro Prismatic Polycarbonate for low glare; energy-efficient LEDs with very good color rendering; available in the light colors 3000K and 4000K; CRI ≥ 90; the LEDs lifetime 50000 hours; the degree of protection IP 20; optional electronic transformer, on/off, 1-10V dimmable or DALI control.

Specification

Model Number	QU6882-40V-SUD
System Power	L1134mm: 46W-3000K-2610lm/ 4000K-2760lm L1484mm: 60W-3000K-3420lm/ 4000K-3600lm
Optic Cover	Micro Prismatic Cover
Light Distribution	Up25%-Down75%
CRI	90
Electronic Transformer	O-OnOff/ DIM1-1~10V/ DIM2-DALI
Surface color	Silver/ White/ Black
Dimension	W68 mm*H82 mm*L1146 mm/ (L1484mm or Customized Length)

Contact: Phone 400 608 0665

Email: billniu@360lamps.com

Website: <https://shop.360lamps.com>